


FENCE SPECIFICATIONS


	RESIDENTIAL	PARKWAY	COMMERCIAL	INDUSTRIAL
PICKET:	5/8"sq. / .050"	1"x5/8" / .045"	3/4"sq. / .060"	1"sq. / .062"
RAIL:	1-1/16" / .062" 1" / .072"	1-1/16" / .062" 1" / .072"	1-1/16" / .062" 1-1/2" / .072"	1-5/8" / .075" 1-5/8" / .100"
POST: dimension / wall	2"x2" / .062"	2"x2" / .062"	2"x2" / .062"	2.5"x2.5" / .075"
GATE POST:	2"x2" / .125"	2"x2" / .125"	2"x2" / .125"	2.5"x2.5" / .125"
SPACING:	3-15/16" between pickets	3-15/16" between pickets	3-15/16" between pickets	3-15/16" between pickets
INSTALLED CENTERS:	72" o/c 2" post	70-1/2" o/c 2" post	71-1/8" o/c 2" post 94-3/4" o/c 2-1/2" post	71" o/c 2-1/2" post 96" o/c 2-1/2" post
HEIGHTS:	36", 42", 48", 54", 60", 72"	36", 42", 48", 54", 60", 72"	36", 42", 48", 54", 60", 72"	36", 48", 60", 72", 84", 96"
STANDARD COLORS:	white, black, bronze, tan, hunter green	white, black, bronze, tan, hunter green	white, black, bronze, tan, hunter green	white, black, bronze, tan, hunter green
HORIZONTAL RAILS:	3 on 36"-72"	3 on 36"-72"	3 on 36"-72"	3 on 36"-72" 4 on 84"-96"
ALLOY:	6063 T5 alloy on pickets, posts and rails	6063 T5 alloy on pickets, posts and rails	6063 T5 alloy on pickets, posts and rails	6063 T5 alloy on pickets, posts and rails
STRENGTHS:	Over 250 lbs.	Over 250 lbs.	Over 554 lbs.	Over 1000 LBS.

RAIL SPACING


RESIDENTIAL / PARKWAY / COMMERCIAL

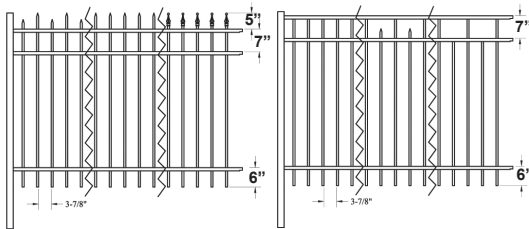


INDUSTRIAL

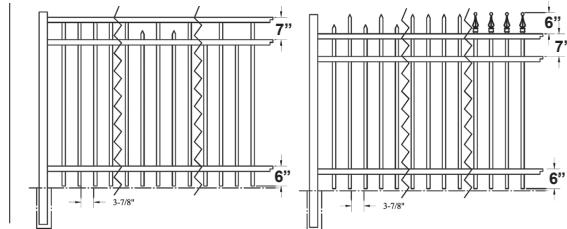


RESIDENTIAL PICKET




PARKWAY



COMMERCIAL



INDUSTRIAL



RAIL

